



2M\CDN080\402
 CONN_SOCKET_SOXS\BM
 CONN_SOCKET_SOXS\BM

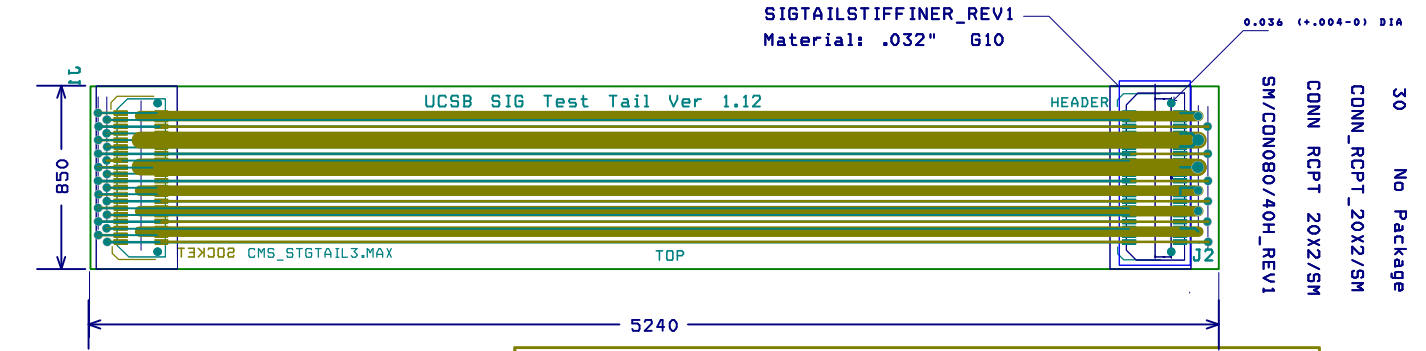

30 No Package
 CONN_RCPT_20X2/SM
 CONN RCPT 20X2/SM
 SM/CDN080/40H_REV1



DRILL CHART				
SYM	DIAM	TOL	QTY	NOTE
+	0.020		30	
◇	0.028		2	
×	0.036	+4 -0	8	NON-PLATED
TOTAL			40	

4. Top Connector NAIS PN ANn440330S Header, BOTTOM CONNECTOR is NAIS PN AXN340038S Socket
3. For use with Hybrids with up facing Tail connectors & UTRI/TEST Card 680-1174-400-C 04-2002
2. 5.8 mils Kapton, 1mil 2x sided Cu, 2 mil Polyimide overlay, 10 mils total thickness
1. 9 mil sig (50 ohm) traces, 12 mils pwr traces, 50/80 mils ground traces

NOTES: